


M3G/D3G REFLEX SIGHT INSTRUCTION MANUAL

IMPORTANT!

LOOSEN SET SCREW WITH INCLUDED SCREW DRIVER BEFORE ADJUSTING ALIGNMENT!

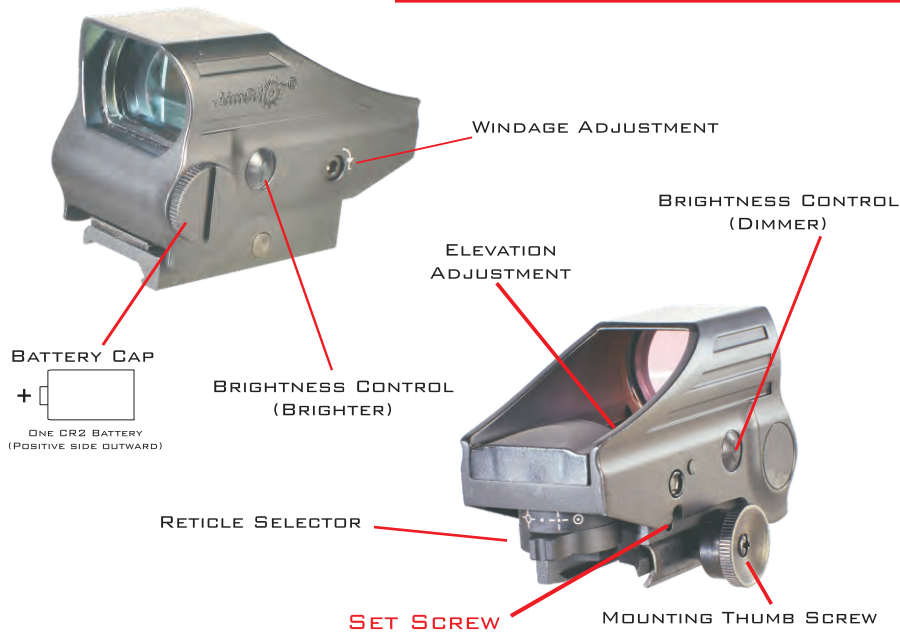

CAUTION: OVER LOOSENING THE ADJUSTMENT SCREWS WILL VOID WARRANTY.

BATTERY INSTALLATION:

UNSCREW BATTERY CAP. INSERT CR2 BATTERY (POSITIVE SIDE OUTWARDS). REPLACE BATTERY CAP.

MOUNTING:

THE RAIL MOUNT BUILT INTO THE REFLEX SIGHT WILL FIT MOST STANDARD RAILS. THE SIGHT SHOULD BE MOUNTED AT LEAST THREE INCHES FROM YOUR EYES WHEN SHOOTING. LOOSEN THE MOUNTING THUMB SCREW AND SET THE SIGHT ON YOUR RAIL. SLIDE THE SIGHT ALONG THE RAIL UNTIL THE SCREW ON THE MOUNT SLIDES INTO A GROOVE. TIGHTEN MOUNTING THUMB SCREW.

OPERATION:

PRESS EITHER BRIGHTNESS CONTROL BUTTON TO TURN ON. PRESS BOTH BUTTONS SIMULTANEOUSLY TO TURN OFF. SIGHT WILL AUTO SHUT OFF AFTER 4 HOURS. THE LEVEL IT IS TURNED OFF WILL TURN ON AT THE SAME LEVEL. 9 LEVELS INCLUDING 2 NIGHT VISION SETTINGS.

ZEROING:

SELECT THE DESIRED RETICLE AND BRIGHTNESS. REST YOUR GUN ON A SOLID SUPPORT, CLAMPING IT, IF POSSIBLE. WE STRONGLY RECOMMEND USING THE AIMSHOT BORE SIGHT TO ZERO THE REFLEX SIGHT. **LOOSEN THE SET SCREW WITH INCLUDED SCREWDRIVER.** WITH THE BORE SIGHT, SIMPLY ALIGN THE RETICLE TO THE LASER DOT USING THE WINDAGE AND ELEVATION ADJUSTMENTS WITH ALLEN WRENCH PROVIDED. WITHOUT A BORE SIGHT, TEST FIRE SHOTS AT 50 YARDS AND ALIGN THE RETICLE TO WHERE THE BULLET HIT USING THE ELEVATION AND WINDAGE ADJUSTMENTS. **TIGHTEN SET SCREW OR IT WILL NOT HOLD ZERO!** REPEAT AT 100 YARDS FOR MAXIMUM ACCURACY. LOOSEN SET SCREW, ADJUST, TIGHTEN SET SCREW, FIRE. IF YOU CHANGE RETICLE YOU MAY NEED TO SLIGHTLY ADJUST ZERO.