




MS1[®] QDM Sling

Multi-Mission Sling System

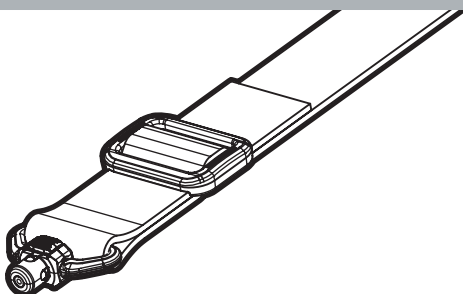


MS1
SYSTEM

- ⚠ **WARNING:** BEFORE STARTING, MAKE SURE THE WEAPON IS UNLOADED, THE CHAMBER IS EMPTY, AND THE SAFETY ENGAGED.
- ⚠ **CAUTION:** PLEASE READ ALL INSTRUCTIONS BEFORE PROCEEDING. COMPONENTS UNDER SPRING PRESSURE MAY EJECT FORCEFULLY AND COULD CAUSE INJURY.
- ⚠ **WARNING:** OBSERVE SAFE FIREARM HANDLING PRACTICES AT ALL TIMES. FAILURE TO DO SO MAY RESULT IN SERIOUS BODILY INJURY OR DEATH. MAGPUL INDUSTRIES SHALL NOT BE RESPONSIBLE FOR INJURY, DEATH OR PROPERTY DAMAGE RESULTING FROM FAULTY INSTALLATION, MISUSE, ILLEGAL USE, OR MODIFICATION OF THIS PRODUCT.


MS1 QDM SLING USAGE INSTRUCTIONS

REAR ATTACHMENT

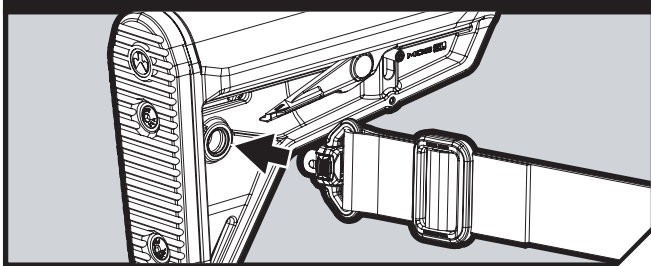


Grip both *QDM Actuation Surfaces* with finger/thumb and push *Rear QDM* into *Stock QD Socket*. Use socket on side facing away from user.

FRONT ATTACHMENT

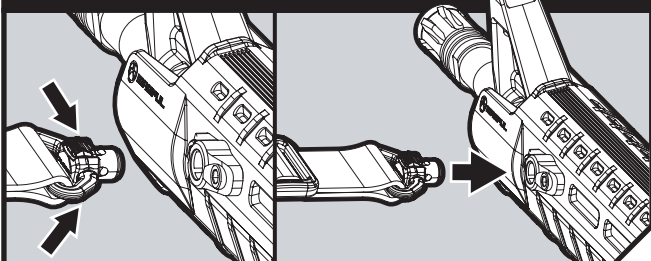


Push *Front QDM* into *QD Socket* of choice on your *Hand Guard*. Use socket on side facing toward user.

TO REMOVE QDM FROM MOUNT

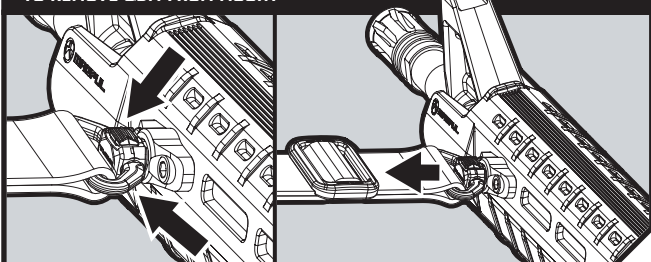

Grip both actuation surfaces with finger/thumb and pull from socket.


ADJUSTING THE MS1 QDM FOR PROPER FIT

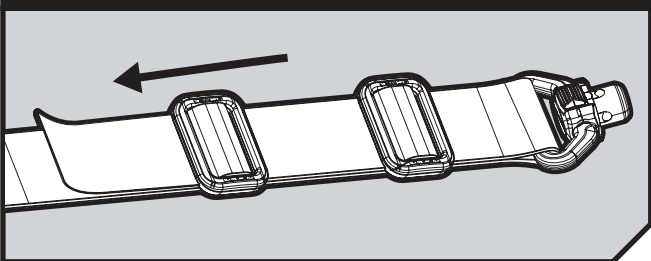

Adjust the length of the sling such that the *Slider* remains accessible by your non-firing hand both when tight (slung) and loose (rifle in use). After you have determined the proper length for your *MS1 QDM Sling*, run the tail end back through both of the *Fit Buckles* provided. Double back any excess material and trim only if necessary.

NOTE: If you do need to trim the webbing, re-bind the frayed end by melting it with a flame.

TWO-POINT ADJUSTMENT

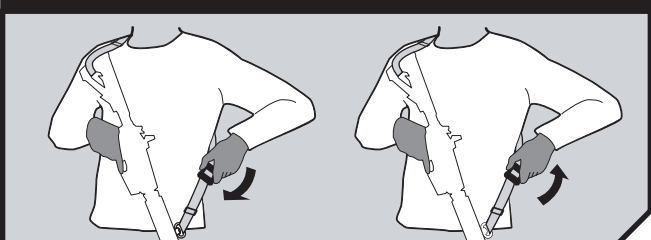

To adjust the *MS1 Sling* while in two point configuration, simply grab the *Slider* with your non firing hand and push down to tighten or pull up to loosen the sling.