



CONTENTS

- MOUNTAIN TECH™ RINGS 4
- * MOUNTAIN TECH™ RAILS 6
 - MAXIMA® BASES 8
- MAXIMA® HORIZONTAL™ RINGS 10
 - MAXIMA® VERTICAL RINGS 11
 - MAXIMA® TIKKA RINGS 12
 - MAXIMA® CZ RINGS 12
 - MAXIMA® RUGER RINGS 12
 - MAXIMA® RIMFIRE RINGS 14
- * VAPOR® RINGS, BASES & 1 PIECE MOUNTS 15
 - SKYLINE™ PRECISION MOUNT 16
- SKYLINE™ PRECISION MOUNT ACCESSORIES 16
 - SKYLINE™ PRECISION BIPOD 18
- SKYLINE™ PRECISION BIPOD ACCESSORIES 18
 - MSR 1 PIECE MOUNTS 20
 - * TACTICAL RED DOT RISER 22
 - TACTICAL A645 SIDE MOUNT 22
 - TACTICAL RED DOT MOUNTS 23
 - * TACTICAL MAGAZINE EXTENSIONS 24
 - TOOLS 25
 - WARNE® SWAG 26
 - TEAM WARNE® PRO STAFF 27

* NEW FOR 2022

WHO IS WARNE:

SHOOTERS AT HEART - We are shooters who create, design, sell and use our products. We enjoy the outdoors and all aspects of the shooting sports. We are proudly based out of the Pacific Northwest in Tualatin, Oregon. Our products are made here in the USA and we are completely hands on during the whole manufacturing process. The Warne® brand has been and always will be "built by shooters, for shooters".



Lifetime Warranty

All Warne Scope Mounts carry our quality guarantee against damage or defects in workmanship for the life of the product.

No Receipt, No Warranty Card, No Package - No Problem.

We will repair or replace (at our discretion) your Warne product in the event it becomes damaged or defective during normal use at no charge to you.

High quality scope mounts & exceptional customer service are our top priorities.

We want you to be satisfied and confident that we stand behind our products round after round.



ICON LEGEND

Look for these icons throughout the catalog to find which of these benefits and features fit your needs.



7075 billet aluminum has the high, strength-to-weight ratio, required for ultra-strong and lightweight mounts. Used in the aerospace industry, 7075 exceeds military specifications.



Hardcoat anodize prevents wear during extreme use.



Epoxy powder coat finish that creates a durable weather-proof and long-lasting finish.



Designed to offer a good strength to weight ratio, attractive finish and high value to shooters.



Durable and reliable for the hunt of a lifetime.



Quickly switch between scope and iron sights, swap scopes or remove scope for easier transport and storage. Toolless design for installation and removal.



Adds protection and keeps the product looking new for greater long term value.



Large capacity allows for maximum round count while maintaining USPSA maximum magazine length limit



Confidently remove and re-mount your scope while maintaining the same point of impact.



Allows the most ergonomic shooting position for MSR's with an optic.



Strength and dependability for law enforcement and military use.



Modern preformed fit that keeps its shape.



Reduces abrasion and wear while giving a unique color finish to individualize your firearm.



Designed specifically to excel at long range precision and extreme distance shooting.



Reinforces thread engagement, eliminating stripped screws.



Highest quality materials - finishes and features that competition shooters demand.



Engineered to be 30-60% lighter than similar mounts.



Superior strength and clamping characteristics specifically formulated for scope mounts.



Better strength and toughness than carbon steel, ideal for hand tools.



Mid capacity allows for additional round count in an easy to carry size.




Made of steel for the strongest foundation available.



Designed with no top button allowing a more comfortable fit when wearing over the head hearing protection.



M-Lok® picatinny rail interface to fit various hand guards for mounting accessories.





Engineered to provide world class performance at the range or in the teld.



Designed to withstand anything Mother Nature dishes out.



Moisture wicking Sport-Tek $^{\mbox{\tiny B}}$ 3.8oz polyester fabric.



Torque wrench allows for aspecific and consistent tightening of various fasteners.



Lightweight and roomy design.



NATO tests show that this attachment method increases repeatable alignment. These mounts are Weaver style and Mil-Spec 1913 compatible.

Zero Capacit Zero additional capacity adds additional strength and cosmetic appeal.





LIGHTWEIGHT & ELEMENT PROOF - We engineered Warne® Mountain Tech™ as a lightweight and rugged scope ring design that is equally at home on a mountain rifle or precision target rifle. Featuring 7075 aluminum construction and stainless hardware to withstand the punishing conditions Mother Nature can dish out. (DESIGN PATENT DB02703)

KEY FEATURES:

Ав

R ISR

NS NATO/ STANAG

D/ Hardcoat AG Anodized Fin R-Retu

turn to Ele

H20

Lightweigh

eight C


Cerakote Finish


Hu

Ts g Targ shoo

BEST USES:







| PART NUMBER | RING HEIGHT | FITS OBJECTIVE SIZE* (General Ranges) | DIMENSION A | DIMENSION B | DIMENSION C | DIMENSION D | WEIGHT (Per Pair) | RING STYLE |
|----------------|----------------|---------------------------------------|----------------|----------------|----------------|----------------|-----------------------------|---------------|
| 7200M | Low | 20-36mm objective | 1 inch | .275" | .705" | | 2.9 oz | FIXED |
| 7201 (M or BB) | Medium | 36-42mm objective | 1 inch | .400" | .705" | | 3.9 oz | FIXED |
| 7202M | High | 42-52mm objective | 1 inch | .550" | .705" | | 4.2 oz | FIXED |
| 7204M | Ultra High | MSR Ideal Height | 1 inch | | .705" | 1.4" | 5.1 oz | FIXED |
| 7213 (M or BB) | Low | 24-42mm objective | 30mm | .275" | .705" | | 3.5 oz | FIXED |
| 7214 (M or BB) | Medium | 42-52mm objective | 30mm | .400" | .705" | | 3.9 oz | FIXED |
| 7215M | High | 50-56mm objective | 30mm | .550" | .705" | | 4.5 oz | FIXED |
| 7217M | Ultra High | MSR Ideal Height | 30mm | | .705" | 1.4" | 5.1 oz | FIXED |
| 7220M | Low | 30-42mm objective | 34mm | .275" | .705" | | 3.9 oz | FIXED |
| 7221M | Medium | 42-52mm objective | 34mm | .400" | .705" | | 4.2 oz | FIXED |
| 7222M | High | 52+mm objective | 34mm | .550" | .705" | | 4.5 oz | FIXED |
| 7224M | Ultra High | MSR Ideal Height | 34mm | | .705" | 1.4" | 5.1 oz | FIXED |
| 7240M | Low | 30-42mm objective | 35mm | .275" | .705" | | 3.9 oz | FIXED |
| 7241M | Medium | 42-52mm objective | 35mm | .400" | .705" | | 4.2 oz | FIXED |
| 7242M | High | 52+mm objective | 35mm | .550" | .705" | | 4.5 oz | FIXED |
| 7244M | Ultra High | MSR Ideal Height | 35mm | | .705" | 1.4" | 5.1 oz | FIXED |
| 7250M | Low | Up to 52mm objective | 40mm | .325" | .705" | 1.24" | 4.3 oz | FIXED |

^{*} All sizes listed are approximate, every firearm and scope set up varies.

FINISH COLOR LEGEND:

Finish color is determined by the specific letter at the END of the part number. All part numbers are available in matte finish [M] and part numbers available in cerakote burnt bronze will have a [BB] notated above.

Final part number example: 7201M is matte black and 7201BB is burnt bronze finish.









VERSATILITY & STABILITY - Warne® Mountain Tech™ rails offer shooters the advantage of a consistent mounting platform across multiple firearms, enhanced ability to adjust proper eye relief and superior alignment of ring mounts. With self-centering hardware and aerospace grade materials, our Mountain Tech™ rails provide a lightweight and robust platform for your rifle.





| | FIREARM MANUFACTURER & MODEL | WITH Z | E RAIL ERO MOA | | IL WITH 20 MOA | |
|-------------|------------------------------------------------------------------------------------------------------|-----------------|-------------------|----------------------------|----------------------------|--|
| - | Bergara Premier Series (Rem 700 style, 8-40 Screws) | 7671M | 7672M | 7671-20MOA | 7672-20MOA | |
| | Browning X-Bolt | 7641M 7641BB | 7642M 7642BB | 7641-20MOA 7641BB-20MOA | 7642-20MOA 7642BB-20MOA | |
| | Browning X-Bolt Super Short Action | 7640M | | 7640-20M0A | | |
| r) | CZ 452/455 | | | 7755M [†] | 7755M [†] | |
| | CZ 457 | | | 7757M [†] | 7757M [†] | |
| | HS Precision (8-40 Screws) | 7671M | 7672M | 7671-20MOA | 7672-20M0A | |
| | Howa 1500 & 1700 | 7650M | 7651M | 7650-20M0A | 7651-20M0A | |
| | Howa Mini Action | 7656M | 7656M | 7656-20MOA | 7656-20MOA | |
| | Kimber 84M | 7657M | 7657M | 7657-20MOA | 7657-20MOA | |
| | Kimber 84L | 7658M | 7658M | 7658-20MOA | 7658-20M0A | |
| | Kimber 8400 WSM | 7659M | 7659M | 7659-20MOA | 7659-20MOA | |
| | Kimber 8400 Magnum | 7660M | 7660M | 7660-20M0A | 7660-20M0A | |
| | Nosler M48 | 7682M | 7683M | 7682-20MOA | 7683-20MOA | |
| | Remington Police & XCR .338 LM (8-40 Screws) | 7671M | 7672M | 7671-20M0A | 7672-20MOA | |
| | Remington 700 | 7673M 7673BB | 7674M 7674BB | 7673-20MOA 7673BB-20MOA | 7674-20MOA 7674BB-20MOA | |
| | Ruger American Centerfire | 7684M | 7685M | 7684-20M0A | 7685-20M0A | |
| | Savage Accu-Trigger, Round Receiver, All Center Fire [§] Accu-Trigger (with 8-40 Screws) | 7666M 7664M | 7667M 7665M | 7666-20MOA 7664-20MOA | 7667-20MOA 7665-20MOA | |
| | Savage 220F Slug Gun | | 7667M | | 7667-20MOA | |
| | Savage AXIS & Edge | 7699M | 7699M | 7699-20MOA | 7699-220MOA | |
| | Savage AXIS/AXIS II 2021 & Newer models (8-40 Screws) | 7698M | 7698M | 7698-20MOA | 7698-20MOA | |
| | Tikka T3, T3X | 76T3M | 76T3M | 76T3-20MOA | 76T3-20M0A | |
| | Weatherby Mark V Magnum 9 Lug, Except .240 WM | 7654M | 7654M | 7654-20MOA | 7654-20MOA | |
| | Weatherby Mark V Standard 6 Lug | 7653M | 7653M | 7653-20MOA | 7653-20MOA | |
| | Weatherby Vanguard | 7650M | 7651M | 7650-20M0A | 7651-20MOA | |
| | Winchester Model 70 Standard Pre & Post 64 with .860 RHS* | 7675M | 7676M | 7675-20MOA | 7676-20MOA | |
| | Winchester Model 70 WSM | 7677M | | 7677-20MOA | | |
| | Winchester XPR | 7688M | 7686M | 7688-20MOA | 7686-20MOA | |
| | Marlin 336, 375 61895 | | | M636-20M0A | M636-20M0A | |
| 3 | Remington 700 | M673M | M674M | M673-20M0A | M674-20M0A | |
| 2 | Ruger Mini 14 Ranch Rifle, 30, 77/22, 77/44, PC9 & PC40 | A971M | A971M | | | |
| | Savage B-Mag | A631M | | | | |
| SIEEL RAILS | Tikka T3, T3X | М6ТЗМ | метзм | M6T3-20M0A | M6T3-20M0A | |
| | Weatherby Mark V Magnum 9 Lug, Except .240 WM | M654M | M654M | M654-20M0A | M654-20M0A | |

^{† 15}MOA Picatinny Rail Adapter

FINISH COLORS: All part numbers are matte black unless notated with a "BB" for cerakote burnt bronze.

[§] Will not fit the Savage Model 25.

^{*} RHS=Rear Hole Spacing: The measurement between the two rear screw holes, center to center.





STRENGTH & VERSATILITY - Warne® Maxima® steel bases are the strongest and most versatile mounting system available today. The simple low profile design along with steel construction is a significant upgrade from any other 2 piece bases.

| MANUFACTURER & MODEL | 2 PIECE STEEL BASE SET | MANUFACTURER & MODEL | 2 PIECE STEEL BASE SET |
|----------------------------------------------------------------------------|---------------------------|-----------------------------------------------------------------------------|---------------------------|
| Anschutz (All) Marlin A1 & 50 Gloss | M824/824M | Ruger 10/22 | M858/918M |
| Browning A-Bolt, 22 Micro-Medallion, | M918/918M | Ruger American | M902/902M |
| WSM | 141010/01014 | Sako A-7 | M918/918M |
| Browning A-Bolt Slug Gun | M904/922M | Savage Pre 2003 Bolt Action, Flat | M902/936M |
| Browning A-Bolt 3 | M912/912M | Receiver, Non Accu-Trigger | 141302/330141 |
| Browning BAR, BAR II, Mark II, BLR Lightweight, BPR Pump | M848/848M | Savage Accu-Trigger, Round Receiver, All Center Fire [§] | M902/902M |
| Browning BLR (Steel Receiver) | M838/838M | Savage 10, 110 BA, FCP (Savage Round Receiver with 8-40 Screws) | M912/912M |
| Browning X-Bolt | M927/929M (BB) | Savage Mark II, 93R17 | M824/824M |
| Cooper 21, 36, 38 & 57 | M888/842M | Savage 220F Slug Gun | M902/902M |
| Cooper 16, 22, 50, 52, 54 & 56 | M898/848M (S) | Savage Axis/Edge | M902/902M |
| CVA-V2 Series Round Barrel | M980/980M | Tikka All Flat Tops | M932/932M |
| Howa 1500 & 1700 | M902/876M (BB) | Tikka T3 | М9ТЗМ |
| JC Higgins Model 50 | M902/831M | | *see below |
| Kimber 8400 with 8-40 screws | M887/841M | Thompson Center Encore, Omega & Triumph Bone Collector | M987M *see below |
| Kimber M84 & New 22 with 8-40 screws | M889/843M | Thompson Center Contender | M988M *see below |
| Marlin 9, 45, 30AS, 36, 62, 93, 336, 336C, 375 8 1895 | M864/864M | Thompson Center Venture | M902/902M |
| Marlin 1894 Cowboy, 444, Glenfield 30, Zane Grey | M864/864M | Weatherby Mark V Standard 6 Lug & .240 WM | M888/875M |
| Marlin XL-7 | M902/924M | Weatherby Mark V Magnum 9 Lug, Except .240 WM | M902/879M |
| Mauser 98 Altered | M902/830M | Weatherby Vanguard | M902/876M (BB |
| Mauser 98 Unaltered | M902/832M | Winchester Model 70 Std. Pre & Post | M902/924M |
| Nosler M48 | M902/876M (BB) | 64 with .860 RHS | , |
| Remington 700 | M902/876M (BB) | Winchester Model 70 WSM | M902/924M |
| Remington 7400, 7600, 7615, FOUR, SIX & New 750 | M894/870M | Winchester Model 70 Post 64 Magnum with .330 RHS | M902/802M |
| Remington 783 | M902/902M | Winchester Model 70 Pre 64 Magnum with .440 RHS | M902/818M |
| Remington New Model 7, 600, 660, | M902/801M | Winchester Model 70 WSSM | M902/903M |
| 670, 673, XP-100 & XR-100 | * | Winchester XPR | M916/954M |

^{*} The M9T3M, M987M & M988M part numbers are a 1 piece Weaver style bases not a 2 piece base set.

§ Will not fit the Savage Model 25.

RHS= Rear Hole Spacing: The measurement between the two rear screw holes, center to center.

Finish color is determined by the specific letter at the END of the part number. All part numbers are available in matte finish (M) and part numbers available in burnt bronze will have a (BB) notated above. (M) is blued finish and (BB) is cerakote finish. Final part number example: M902/876M is matte black finish and M902/876BB is burnt bronze finish.



KEY FEATURES:

BEST USES:



Ts



MAXIMA® HORIZONTAL




WHY WE DESIGNED THESE:

THE NEW STANDARD - Warne® Maxima® Horizontal™ Rings evolved from the concept of incorporating the world renowned performance, materials and reputation of Maxima rings in a more traditional, horizontally split configuration. Maxima Horizontal rings include several design features that enhance performance, ease installation and include the return to zero guarantee that Warne is known for.


KEY FEATURES:

BEST USES:





|) | PART NUMBER | RING HEIGHT | FITS OBJECTIVE SIZE* (General Ranges) | DIMENSION A | DIMENSION B | DIMENSION C | WEIGHT | RING STYLE |
|------------|----------------|----------------|---------------------------------------|----------------|----------------|----------------|--------|---------------|
| ← C | 500M | Low | 20-36mm objective | 1 inch | .250" | .650" | 4.9 oz | FIXED |
| | 501M | Medium | 36-42mm objective | 1 inch | .375" | .650" | 5.8 oz | FIXED |
| | 502M | High | 42-52mm objective | 1 inch | .525" | .650" | 6.8 oz | FIXED |
| | 513M | Low | 24-42mm objective | 30mm | .250" | .650" | 5.0 oz | FIXED |
| | 514M | Medium | 42-52mm objective | 30mm | .375" | .650" | 6.0 oz | FIXED |
| | 515M | High | 50-56mm objective | 30mm | .525" | .650" | 6.9 oz | FIXED |

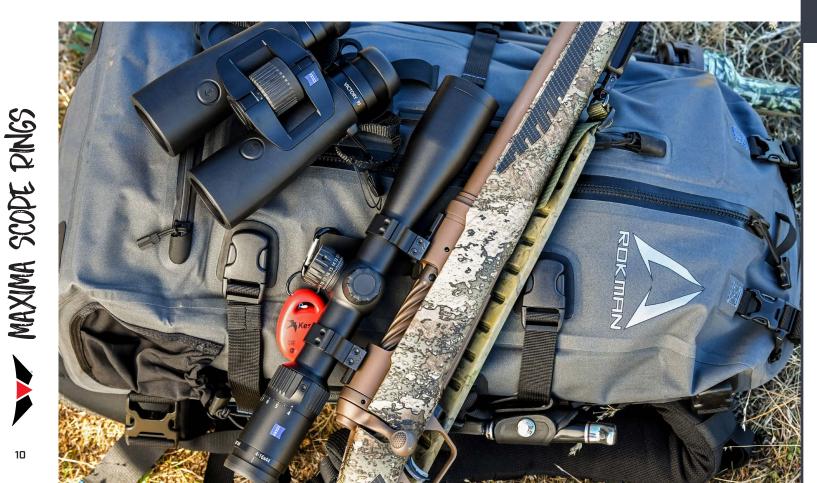





WHY WE DESIGNED THESE:


INCREDIBLE HOLDING POWER & ELEGANT PROFILE - Warne® Maxima® Rings have proven to be the strongest scope rings on the market. The vertically split design offers robust simplicity and ease of installation. American made quality and precision at an affordable price make Warne® Maxima® scope rings the best in their class.




KEY FEATURES:

BEST USES:

| PART NUMBER | RING HEIGHT | FITS OBJECTIVE SIZE* (General Ranges) | DIMENSION A | DIMENSION B | DIMENSION C | WEIGHT | RING STYLE |
|----------------|----------------|------------------------------------------|----------------|----------------|----------------|--------|---------------|
| 200M | Low | 20-36mm objective | 1 inch | .250" | .705" | 4.3 oz | FIXED |
| 201M | Medium | 36-42mm objective | 1 inch | .375" | .705" | 5.2 oz | FIXED |
| 202M | High | 42-52mm objective | 1 inch | .525" | .705" | 6.2 oz | FIXED |
| 203M | Extra High | 50-56mm objective | 1 inch | .650" | .705" | 6.8 oz | FIXED |
| 213M | Low | 24-42mm objective | 30mm | .250" | .705" | 4.6 oz | FIXED |
| 214M | Medium | 42-52mm objective | 30mm | .375" | .705" | 5.3 oz | FIXED |
| 215M | High | 50-56mm objective | 30mm | .525" | .705" | 6.2 oz | FIXED |
| 216M | Extra High | Up to 62mm OD | 30mm | .650" | .705" | 7.1 oz | FIXED |
| 220M | Low | 30-42mm objective | 34mm | .250" | .705" | 4.7 oz | FIXED |
| 221M | Medium | 42-52mm objective | 34mm | .375" | .705" | 5.5 oz | FIXED |
| 222M | High | 52+mm objective | 34mm | .525" | .705" | 6.4 oz | FIXED |
| 231M | Medium | 36-65mm objective | 36mm | .375 | .705" | 5.9 oz | FIXED |
| 200LM | Low | 20-36mm objective | 1 inch | .250" | .705" | 4.9 oz | QUICK DETACH |
| 201LM | Medium | 36-42mm objective | 1 inch | .375" | .705" | 5.8 oz | QUICK DETACH |
| 202LM | High | 42-52mm objective | 1 inch | .525" | .705" | 6.8 oz | QUICK DETACH |
| 203LM | Extra High | 50-56mm objective | 1 inch | .650" | .705" | 7.4 oz | QUICK DETACH |
| 204LM | Ultra High | MSR Ideal Height | 1 inch | .935" | .705" | 9.3 oz | QUICK DETACH |
| 213LM | Low | 24-42mm objective | 30mm | .250" | .705" | 5.2 oz | QUICK DETACH |
| 214LM | Medium | 42-52mm objective | 30mm | .375" | .705" | 5.9 oz | QUICK DETACH |
| 215LM | High | 50-56mm objective | 30mm | .525" | .705" | 6.9 oz | QUICK DETACH |
| 216LM | Extra High | Up to 62mm OD | 30mm | .650" | .705" | 7.7 oz | QUICK DETACH |
| 217LM | Ultra High | MSR Ideal Height | 30mm | .850" | .705" | 9.7 oz | QUICK DETACH |
| 220LM | Low | 30-42mm objective | 34mm | .250" | .705" | 5.3 oz | QUICK DETACH |
| 221LM | Medium | 42-52mm objective | 34mm | .375" | .705" | 6.0 oz | QUICK DETACH |
| 222LM | High | 52+mm objective | 34mm | .525" | .705" | 7.1 oz | QUICK DETACH |
| 231LM | Medium | 36-65mm objective | 36mm | .375" | .705" | 6.4 oz | QUICK DETACH |
| | | | | | | | |





^{*} All sizes listed are approximate, every firearm and scope set up varies.

split rings that handle even the most punishing recoil, or large, heavy scopes.

Warne's Maxima® grooved reciever rings are solid steel, vertically



WHY WE DESIGNED TIKKA RINGS:

SIMPLICITY! - Tikka rifles have a grooved receiver that allows for a dovetail ring to mount directly to it, negating the need for a base.

Tikka Rail and base options:

76T3M - Aluminum rail for Tikka T3, T3X models (page 6) **76T3-20M0A** - 20M0A aluminum rail for Tikka T3, T3X models (page 6)

M6T3M - Steel rail for Tikka T3, T3X models (page 24) M6T3-20MOA - 20MOA steel rail for Tikka T3, T3X models (page 24)

M9T3M - Steel Weaver style 1 piece base for Tikka T3 models (page 9)

M932/932M - Steel Weaver style 2 piece bases for all flat top Tikka models (page 9)



WHY WE DESIGNED CZ RINGS:

DIRECT FIT UPGRADE - Designed to fit the 19mm 550/557 and the 16mm 527 integral dovetails.

11mm Picatinny Rail Adapter Options: (page 6) **7755M** - 15MOA rail for CZ 452/455 models **7757M** - 15MOA rail for CZ 457 models





WHY WE DESIGNED RUGER RINGS:

MODEL SPECIFIC FIT - Sold in pairs, Maxima® Ruger rings are packaged in model specific configurations to fit Ruger's proprietary dovetails.








BEST USES:







| | PART NUMBER | RING HEIGHT | FITS OBJECTIVE SIZE* (General Ranges) | DIMENSION A | DIMENSION B | DIMENSION C | WEIGHT (Per Pair) | RING STYLE |
|--------------------------------------------|------------------------------------|----------------------------------|----------------------------------------------------------------------------------|----------------------------------|----------------------------------|----------------------------------|--------------------------------------|--------------------------------------------------------------|
| Fits only TIKKA MODELS | 1TM 2TM 14TM 15TM | Medium High Medium High | 20-42mm objective 42-52mm objective 24-52mm objective 50-56mm objective | 1 inch 1 inch 30mm 30mm | .460" .570" .460" .570" | .705" .705" .705" .705" | 5.6 oz 6.3 oz 5.7 oz 6.4 oz | FIXED FIXED FIXED FIXED |
| Fits TIK | 1TLM 2TLM 14TLM 15TLM | Medium High Medium High | 20-42mm objective 42-52mm objective 24-52mm objective 50-56mm objective | 1 inch 1 inch 30mm 30mm | .460" .570" .460" .570" | .705" .705" .705" .705" | 6.0 oz 6.8 oz 6.1 oz 6.8 oz | QUICK DETACH QUICK DETACH QUICK DETACH QUICK DETACH |
| only 527 DELS | 1B1M 2B1M 14B1M 15B1M | Medium High Medium High | 20-42mm objective 42-52mm objective 24-52mm objective 50-56mm objective | 1 inch 1 inch 30mm 30mm | .425" .535" .425" .535" | .705" .705" .705" .705" | 5.3 oz 6.0 oz 5.4 oz 6.1 oz | FIXED FIXED FIXED FIXED |
| Fits only CZ 527 MODELS | 1B1LM 2B1LM 14B1LM 15B1LM | Medium High Medium High | 20-42mm objective 42-52mm objective 24-52mm objective 50-56mm objective | 1 inch 1 inch 30mm 30mm | .425" .535" .425" .535" | .705" .705" .705" .705" | 5.8 oz 6.5 oz 5.9 oz 6.6 oz | QUICK DETACH QUICK DETACH QUICK DETACH QUICK DETACH |
| s only 550 DELS | 1BM 2BM 14BM 15BM | Medium High Medium High | 20-42mm objective 42-52mm objective 24-52mm objective 50-56mm objective | 1 inch 1 inch 30mm 30mm | .425" .535" .425" .535" | .705" .705" .705" .705" | 5.4 oz 6.1 oz 5.4 oz 6.3 oz | FIXED FIXED FIXED FIXED |
| Fits only CZ 550 MODELS | 1BLM 2BLM 14BLM 15BLM | Medium High Medium High | 20-42mm objective 42-52mm objective 24-52mm objective 50-56mm objective | 1 inch 1 inch 30mm 30mm | .425" .535" .425" .535" | .705" .705" .705" .705" | 5.9 oz 6.7 oz 6.1 oz 6.9 oz | QUICK DETACH QUICK DETACH QUICK DETACH |
| only 18 MINI 14 JELS | 1RM 2RM 14RM 15RM | Medium High Medium High | 20-42mm objective 42-52mm objective 24-52mm objective 50-56mm objective | 1 inch 1 inch 30mm 30mm | .460" .585" .460" .585" | .705" .705" .705" .705" | 5.6 oz 6.5 oz 5.7 oz 6.5 oz | FIXED FIXED FIXED FIXED |
| Fits only Ruger no.18 mini 14 MODELS | 1RLM 2RLM 14RLM 15RLM | Medium High Medium High | 20-42mm objective 42-52mm objective 24-52mm objective 50-56mm objective | 1 inch 1 inch 30mm 30mm | .460" .585" .460" .585" | .705" .705" .705" .705" | 6.0 oz 6.9 oz 6.1 oz 6.8 oz | QUICK DETACH QUICK DETACH QUICK DETACH QUICK DETACH |
| Fits only Ruger M77 & HAWKEYE MODELS | 1R7M 2R7M 14R7M 15R7M | Medium High Medium High | 20-42mm objective 42-52mm objective 24-52mm objective 50-56mm objective | 1 inch 1 inch 30mm 30mm | .460" .585" .460" .585" | .705" .705" .705" .705" | 6.0 oz 6.9 oz 6.1 oz 6.9 oz | FIXED FIXED FIXED FIXED |
| Fits RUGER M77 | 1R7LM 2R7LM 14R7LM 15R7LM | Medium High Medium High | 20-42mm objective 42-52mm objective 24-52mm objective 50-56mm objective | 1 inch 1 inch 30mm 30mm | .460" .585" .460" .585" | .705" .705" .705" .705" | 6.4 oz 7.2 oz 6.6 oz 7.3 oz | QUICK DETACH QUICK DETACH QUICK DETACH QUICK DETACH |

^{*} All sizes listed are approximate, every firearm and scope set up varies.





OVER BUILT FOR THE TASK - The Warne® Rimfire rings were created to fit both the 3/8th inch and 11mm dovetails found on many common rimfire rifles. Featuring a unique 70/30 horizontal split design, these steel rimfire rings are the best available.

Warne Tip: When installing either style Rimfire rings, be sure to notice which direction the small dot on the side clamp is facing. If it is in the 'up' position the rings will fit a 3/8" dovetail and if the dot is facing 'down' it will fit an 11mm dovetail.

BEST USES:

| | RтZ | |
|---|-------------------|--|
| d | Return to Zero | |

KEY FEATURES:

Ss









| → | | ← C | PART NUMBER | RING HEIGHT | FITS OBJECTIVE SIZE* (General Ranges) | DIMENSION A | DIMENSION B† | DIMENSION C | WEIGHT (Per Pair) | RING STYLE |
|----------|-----|-----|----------------|----------------|------------------------------------------|----------------|-----------------|----------------|-----------------------------|--------------|
| | | | 721M | Medium | 20-42mm objective | 1 inch | .400" | .502" | 3.2 oz | FIXED |
| ı | • | | 722M | High | 42-52mm objective | 1 inch | .525" | .502" | 3.6 oz | FIXED |
| | | | 721LM | Medium | 20-42mm objective | 1 inch | .400" | .502" | 3.8 oz | QUICK DETACH |
| | | | 722LM | High | 42-52mm objective | 1 inch | .525" | .502" | 4.3 oz | QUICK DETACH |
| | ° 🕲 | | 731M | Medium | 20-42mm objective | 30mm | .400" | .502" | 3.6 oz | FIXED |
| d | | | 732M | High | 42-52mm objective | 30mm | .525" | .502" | 4.1 oz | FIXED |
| | | | | | | | | | | |





WHY WE DESIGNED THESE:

AFFORDABLE, MADE IN USA QUALITY - Our Vapor® line of mounts were developed and engineered to provide you with a strong and economical mounting solution that outperforms other mounts in their class.



KEY FEATURES:









BEST USES:




2 PIECE BASES




| MANUFACTURER & MODEL | PART NUMBER |
|--------------------------------------------|----------------|
| Browing X-Bolt | V427/429M |
| Browning A-Bolt 3 with 8-40 screws | V412/412M |
| Christensen Arms All Mesa, Ridgeline | V402/476M |
| Howa 1500 | V402/476M |
| Marlin Lever Action 336, 1894, 1895 | V464/464M |
| Remington 700 | V402/476M |
| | |

| MANUFACTURER & MODEL | PART NUMBER |
|-----------------------------------|-----------------------------------------------------------------------------------------------------------------------------------|
| Ruger American Rimfire | V425/425M |
| Ruger American Centerfire | V402/402M |
| Savage 10/110 with 8-40 screws | V412/412M |
| Savage 10/110 with 6-48 screws | V402/402M |
| Weatherby Vanguard | V402/476M |
| Winchester Model 70 with .860 RHS | V402/424M |
| | Ruger American Rimfire Ruger American Centerfire Savage 10/110 with 8-40 screws Savage 10/110 with 6-48 screws Weatherby Vanguard |

RHS= Rear Hole Spacing: The measurement between the two rear screw holes, center to center.





RINGS & MSR MOUNTS

| | PART NUMBER | RING HEIGHT | FITS OBJECTIVE SIZE* (General Ranges) | DIMENSION A | DIMENSION B† | DIMENSION C | DIMENSION D | WEIGHT | RING STYLE |
|---|-----------------------------|--------------------------|-------------------------------------------------------------|----------------------------|-------------------------|-------------------------|----------------|----------------------------|--------------------|
| • | V400M V401M V402M | Low Medium High | 20-36mm objective 36-42mm objective 42-52mm objective | 1 inch 1 inch 1 inch | .225" .350" .550" | .600" .600" .600" | | 1.6 oz 1.9 oz 2.2 oz | 2 PIECE WEAVER |
| - | V413M V414M V415M | Low Medium High | 24-42mm objective 42-52mm objective 50-56mm objective | 30mm 30mm 30mm | .225" .350" .550" | .600" .600" .600" | | 1.8 oz 2.0 oz 2.3 oz | 2 PIECE WEAVER |
| | V420M V421M V422M | Low Medium High | | 1 inch 1 inch 1 inch | | | | | 2 PIECE RIMFIRE |
| - | V4001M V4011M [20M0A] | Ultra High Ultra High | MSR Ideal Height MSR Ideal Height | 1 inch 1 inch | 1.40" 1.39" | .750" .750" | | 4.7 oz 4.7 oz | 1 PIECE MSR |
| | V4002M V4012M [20M0A] | Ultra High Ultra High | MSR Ideal Height MSR Ideal Height | 30mm 30mm | 1.40" 1.39" | .750" .750" | | 4.7 oz 4.7 oz | 1 PIECE MSR |

^{*} All sizes listed are approximate, every firearm and scope set up varies.

VADOR RINGS AND MOUNTS

 $^{^\}dagger$ For the RINGS - Measurement is from top of base to the botton of scope tube. (see diagram example on page 14)

[†] For the 1 PIECE MOUNTS - Measurement is from the top of the rail to the center of the scope tube.

SKYLINE PRECISION SHOOTING ACCESSORIES



WHY WE DESIGNED THESE:

1 PIECE MODULARITY - The Warne® Skyline™ Precision Mount has been engineered from the ground up with the precision rifle shooter/competitor in mind. Machined from 7075 T6 aluminum billet, featuring 2 integral recoil lugs along with 4 mounting cross bolts and 10 unique accessory mounting locations, the precision mount easily handles the rigors of competition or hard use, military type environments.



7852M PRECISION MOUNT LEVEL



7899L
DATA CARD LABEL REFILL - 50pk
*Extra adhesive labels are sold separately



7850M PRECISION MOUNT O' ACCESSORY



USL1 (1"), USL30 (30mm), USL34 (34mm), USL35 (35mm) UNIVERSAL SCOPE LEVEL



7851M PRECISION MOUNT 90° ACCESSORY RAII



7854M PRECISION MOUNT DATA CARD HOLDER*



7855M (30mm), 7856M (34mm), 7857M (35mm) UNIVERSAL DATA CARD HOLDER*





O A



20 Element Proof










- Precision Mount Data Card Holder Attaches exclusively to the Precision Mount in right or left configurations, and gives shooters a major advantage by its mounting location and ease of use.
- Universal Data Card Holder Easily attaches to the scope tube, in left or right configurations, for a universal fit.

 Data is displayed in a convenient location to make quick and accurate target transitions, and the articulating arm allows for low profile storage while not in use.
- Precision Mount Level Attaches exclusively to the top of the Precision Mount, in left or right configurations, to keep the scope reticle consistently level.
- Universal Scope Mount Level Easily attaches to scope tube, in left or right configurations, to keep the scope reticle level without changing position on the rifle.
- Precision Mount 0° Accessory Rail Attaches exclusively to the Precision Mount in 0° & 45° configurations.
- Precision Mount 90° Accessory Rail Attaches exclusively to the Precision Mount in a 90° configuration.
- Data Card Label Refill Adhesive labels come in a 50 pack to replace when needed.





| NUMBER | HEIGHT | FITS OBJECTIVE SIZE* (General Ranges) | DIMENSION A | DIMENSION B [†] | C | DIMENSION | WEIGHT | MOUNT STYLE |
|---------------------|------------|------------------------------------------|----------------|-----------------------------|-------|-----------|---------|---------------------------------------|
| 7814M | Medium | Up to 68mm outside | 30mm | 1.181" | .813" | 3.23" | 7.10 oz | Standard, OMOA |
| 7817M | Ultra High | MSR Ideal Height | 30mm | 1.386" | .813" | 3.23" | 7.50 oz | Standard, OMOA |
| 7818M 7818-20M0A | Ultra High | MSR Ideal Height | 30mm | 1.540" | .813" | 3.23" | 6.40 oz | Cantilever, OMOA Cantilever, 20MOA |
| 7821M | Medium | Up to 72mm outside | 34mm | 1.181" | .813" | 3.23" | 7.10 oz | Standard, OMOA |
| 7824M | Ultra High | MSR Ideal Height | 34mm | 1.386" | .813" | 3.23" | 7.50 oz | Standard, OMOA |
| 7825M 7825-20MOA | Ultra High | MSR Ideal Height | 34mm | 1.540" | .813" | 3.23" | 6.40 oz | Cantilever, OMOA Cantilever, 20MOA |
| 7841M | Medium | Up to 72mm outside | 35mm | 1.181" | .813" | 3.23" | 7.10 oz | Standard, OMOA |
| 7842M 7842-20MOA | Ultra High | MSR Ideal Height | 35mm | 1.540" | .813" | 3.23" | 6.40 oz | Cantilever, OMOA Cantilever, 20MOA |
| 7844M | Ultra High | MSR Ideal Height | 35mm | 1.386" | .813" | 3.23" | 7.50 oz | Standard, OMOA |

^{*} All sizes listed are approximate, every firearm and scope set up varies.

16

[†] Measurement is from the top of the rail to the center of the scope tube.



BIPOD PERFECTION ACHIEVED - The Warne® Skyline™ Precision Bipod is the most functional, ergonomic and strongest bipod on the market today. Designed to attach to your picatinny or ARCA rail, the Skyline™ bipod allows the shooter to make quick, one-handed height adjustments, as well as smooth cant and panning ability for use on uneven terrain or less than ideal positions.

- Quickly attaches to any Picatinny type rail (7901M) or ARCA rail (7902M)
- Rapid deploy legs lock at: 0°, 45°, 90°
- One handed adjustability
- 22° total cant/44° total pan
- Panning movement can be disabled, allowing only cant.
- Design Patent 10,408,555 & 10,794,655



KEY FEATURES:











BEST USES:













PRECISION BIPOD ARCA RAIL



PRECISION BIPOD ARCA ADAPTER



ARCA RAIL ADAPTER FOR ATLAS BIPOD Atlas® is a registered trademark of B&T Industries LLC



7956M ARCA RAIL ADAPTER FOR SWIVEL STUD STYLE BIPOD



7950M PRECISION BIPOD SPIKE FEET



7953M **SLING SWIVEL ADAPTER** Picatinny rail adapter that mounts to a rifle's existing sling swivel, allowing the use of picatinny style bipods.



7951M PRECISION BIPOD CLAW FEET



7954M PRECISION BIPOD ATLAS® FOOT ADAPTER Atlas® is a registered trademark of B&T Industries LLC



To extend the Bipod legs, simply pull out to desired height. Legs can be retracted one position at a time by pressing in on the height ratchet lever. To fully retract legs, press in on the ratchet lever AND while nolding in, press down to retract.

Standard Leg Extension min height: 6.9" max height: 9.1"

PRECISION BIPOD EXTENSION LEGS Additional 3" of height, giving an overall 12" of total lift.

SKYLINE PRECISION BIPOD



STYLISH 1 PIECE CANTILEVER MSR MOUNT - Designed to have the "Ideal Height" for Modern Sporting Rifles, the X-SKEL® places the optic at the proper height and forward position on AR platforms. Skeletonized design along with steel hardware and threaded inserts provides a lightweight and rigid mounting platform.


- The X-SKEL® Mount is our most popular one piece mounting system used in competition and hunting trips worldwide.
- The LR-SKEL Mount offers 20 MOA built-in slope for long range precision shooting. This allows additional elevation adjustment in your optic when shooting ranges over 600 yards.
- The **SUPER HIGH X-SKEL®** Places optic at correct height for heads up/CQB shooting positions.
- The QD X-SKEL Patent pending dual quick detach levers for fast toolless installation and removal.
- The Rapid Acquisition Multi-Sight Platform, or **R.A.M.P.**, is our Gen 1 cantilever-style scope mounting platform that allows correct scope installation on the popular AR-15 rifle, and also offers unique 45° mounting rails on both sides of the optic.

KEY FEATURES: BEST USES: AL HC CK AR QD RTZ SI LW LR TS HU LEM CO Aluminum Hardcoat Annolized Finish Read Height Patch Parce Inserts Aluminum Hardcoat Cerekote MSR Quick Return to Steel Inserts BEST USES: BEST USES: Lightweight Long Target Hunting LE/Military Competition Target Hunting LE/Military Competition






















| PART NUMBER | RING HEIGHT | FITS OBJECTIVE SIZE* (General Ranges) | DIMENSION A | DIMENSION B [†] | DIMENSION C | WEIGHT | FINISH COLOR |
|---------------------|----------------|------------------------------------------|----------------|-----------------------------|----------------|--------|-------------------------------------------------------------|
| XSKEL1 | Ultra High | MSR Ideal Height | 1 inch | 1.435" | .750" | 6.7 oz | Black, Red, Blue, Dark Earth, OD Green, Tactical Grey |
| XSKEL30 | Ultra High | MSR Ideal Height | 30mm | 1.435" | .750" | 6.7 oz | Black, Red, Blue, Dark Earth, OD Green, Tactical Grey |
| XSKEL34 | Ultra High | MSR Ideal Height | 34mm | 1.435" | .750" | 6.7 oz | Black, Red, Blue, Dark Earth, OD Green, Tactical Grey |
| QDXSKEL1 | Ultra High | MSR Ideal Height | 1 inch | 1.435" | .750" | 8.2 oz | Black, Dark Earth |
| QDXSKEL30 | Ultra High | MSR Ideal Height | 30mm | 1.435" | .750" | 8.2 oz | Black, Dark Earth |
| QDXSKEL34 | Ultra High | MSR Ideal Height | 34mm | 1.435" | .750" | 8.5 oz | Black, Dark Earth |
| LRSKEL1 [20M0A] | Ultra High | MSR Ideal Height | 1 inch | 1.435" | .750" | 6.7 oz | Black, Dark Earth, Tactical Grey |
| LRSKEL30 [20M0A] | Ultra High | MSR Ideal Height | 30mm | 1.435" | .750" | 6.7 oz | Black, Dark Earth, Tactical Grey |
| LRSKEL34 [20M0A] | Ultra High | MSR Ideal Height | 34mm | 1.435" | .750" | 6.7 oz | Black, Dark Earth Tactical Grey |
| RAMP1 | Ultra High | MSR Ideal Height | 1 inch | 1.435" | .750" | 9.5 oz | Black |
| RAMP30 | Ultra High | MSR Ideal Height | 30mm | 1.435" | .750" | 9.5 oz | Black |
| SHXSKEL30 | Super High | Any | 30mm | 1.90" | .750" | 7.8 oz | Black, Dark Earth |
| SHXSKEL34 | Super High | Any | 34mm | 1.90" | .750" | 7.8 oz | Black, Dark Earth |

^{*} All sizes listed are approximate, every firearm and scope set up varies.

DETERMINING YOUR ORDER NUMBER:

Combine Part Number with the Available Finish Letter at the end:

TW= Black R= Red B= Blue DE=Dark Earth DD=OD Green

TG=Tactical Grey (Example: XSKEL1 + Red= XSKEL1R)













 $^{^{\}dagger}$ Measurement is from the top of the rail to the center of the scope tube.



COMPACT 45 DEGREE RAIL - The Warne® A645 is designed as a 45° offset picatinny rail for mounting secondary sighting systems and other accessories.

Lw

| PART NUMBER | FINISH COLOR |
|----------------|-----------------|
| A645TW | Black |
| A645R | Red |
| A645BU | Blue |
| A645DE | Dark Earth |
| A6450D | OD Green |
| A645TG | Tactical Grey |

KEY FEATURES:





BEST USES:

LEM









WHY WE DESIGNED THESE:

VERSATILE RED DOT RISER - With the increasing number of electro optics being used, finding a compatible mounting system can be confusing. We designed our modular Red Dot Riser to fit a wide range of different optics based on the mount footprint or attachment style. All riser mounts that we offer share a robust mounting base, while the top is engineered specifically for different red dot styles.

KEY FEATURES:






















Picatinny Rail



Reflex









KEY FEATURES:

ΑN

MODEL

BEST USES:



Ts Target Shooting

NEW for 2022

WHY WE DESIGNED THESE:

VERSATILE RED DOT RISER - Warne® Handoun Magazine Extensions are available in both increased capacity models, and zero capacity models for 10 round capacity limits. These extensions feature an ergonomic shape that allows for better insertion, and finger grooves, allowing the magazine to be stripped from the handgun if needed.

FINISH

COLOR

Black

- · Machined from 6061 T6 aluminum billet
- Type 2 hardcoat anodize finish for abrasion and corrosion resistance

CAPACITY

+0

• T-10 Torx head screw and washer for retention

HANDGUN

MODEL

Glock 17 & 22

· Designed and Made in USA

PART

NUMBER

3101



NUMBER





CAPACITY

COLOR





+5 9mm/+4 4∩cal

+5. 9mm/+4. 40cal

+5. 9mm/+4. 40cal.

+2

+2

+2

Nark Farth

Grey

Red

Black

Black

Black







| PART NUMBER | HANDGUN MODEL | CAPACITY | FINISH COLOR |
|----------------|------------------|----------|-----------------|
| 3001 | CZ 75 | +0 | Black |
| 3002 | CZ 75 | + | Blue |
| 3003 | CZ 75 | + | Dark Earth |
| 3004 | CZ 75 | + | Grey |
| 3005 | CZ 75 | +0 | Red |
| 3006 | CZ 75 | +3, 9mm | Black |
| 3007 | CZ 75 | +3, 9mm | Blue |
| 3008 | CZ 75 | +3, 9mm | Dark Earth |
| 3009 | CZ 75 | +3, 9mm | Grey |
| 3010 | CZ 75 | +3, 9mm | Red |
| 3011 | CZ 75 | +4, 9mm | Black |
| 3012 | CZ 75 | +4, 9mm | Blue |
| 3013 | CZ 75 | +4, 9mm | Dark Earth |
| 3014 | CZ 75 | +4, 9mm | Grey |
| 3015 | CZ 75 | +4, 9mm | Red |



WHY WE DESIGNED THESE:

THE RIGHT TOOL FOR THE JOB - Designed to make the installation of our mounts and accessories easy, Warne's Range Tool and fixed torque wrenches make a great addition to every range bag.

TW65 TORQUE WRENCH 65IN/LBS

This tool allows the shooter to precisely tighten the ½" hex nut (on Warne's MSR & Tactical Mounts) to the proper torque setting of 65 in/lb. This is indicated when the red light is lit up and an audible beep has been heard.

RT-1 RANGE TOOL

Warne's Range Tool is designed to be the go-to multi-tool for every shooter's range bag. This compact and durable tool features 12 of the most popular driver bits to perform basic firearm maintenance and scope adjustment in the field.

- Aluminum handle
- · Chrome vanadium steel bits
- Pin remover size: 0.10"
- · Flat blade screwdriver • #2 Phillips head screwdriver
- Allen head sizes: 0.05", 1/16", 5/64", 3/32", 1/8" & 5/32"
- Torx driver sizes: T10, T15 & T20





3128

3129

3130

3131

3132

3133

Glock 19 & 23

Glock 19 & 23

Glock 19 & 23

Glock 42

Glock 43

Glock 43X & 48

WHY YOU NEED IT:

SHOW YOUR WARNE PRIDE - Our branded swag is comfortable and stylish to fit a versatile lifestyle. With a variety of fabric and logos colors, our shirts and hats give you the option for a stand-out or subdued look.

KEY FEATURES:

Αв 7075 Billet







BEST USES:







PART SHIRT SIZE PRINT DESIGN NUMBER COLOR T1004S Small T1004M Medium T1004L Large Warne logo, front center Black T1004XL XL Tag line, right sleeve T1004XXL 2XL T1004XXXL 3XL T1003S Small T1003M Medium Warne logo/tag line, T1003L Large Black front left crest T1003XL XL Warne logo, back collar T1003XXL 2XL T1003XXXL 3XL T1002S Small T1002M Medium Warne logo/tag line, T1002L Large Charcoal front left crest T1002XL XL Warne logo, back collar T1002XXL 2XL T1002XXXL 3XL T1001S Small T1001M Medium Warne logo/tag line, T1001L Large front left crest OD Green T1001XL Warne logo, back collar XL T1001XXL 2XL US Flag, right sleeve T1001XXXL 3XL

| PART NUMBER | HAT COLOR | HAT DETAILS |
|----------------|--------------------|---------------------------------------------------------------|
| H1002 | Charcoal/ Black | Synthetic black linen material and standard grey trucker mesh |
| H1003 | Grey/White | Grey chino twill material and standard white trucker mesh |
| H1001 | OD Green/ Brown | OD Green twill material and standard brown trucker mesh |
| H1004 | Orange/ Black | Blaze orange twill material and standard black trucker mesh |

- · Structured modern fit
- · Snap back closure for ease of fitment
- · One size fits all
- · No top button for over the head hearing protection comfort

Professionally screen printed on Sport-Tek® PosiCharge® Competitor™ Tee. Lightweight, roomy and highly breathable, these moisture-wicking tees feature PosiCharge technology to lock in color and prevent logos from fading.

- 3.8-ounce, 100% polyester interlock with PosiCharge technology
- Removable tag for comfort
- · Set-in sleeves




WHO IS TEAM WARNE:

THE BEST AMBASSADORS - Team Warne® is simply the best of the best. We have countless shooters across the globe sporting our logo and running our gear. These 15 shooters are just a small handful of those who love and trust Warne® products. They are amazing individuals, the salt of the earth people, who have been using our products for years and who go out of their way to help new shooters and educate them on the Warne brand.





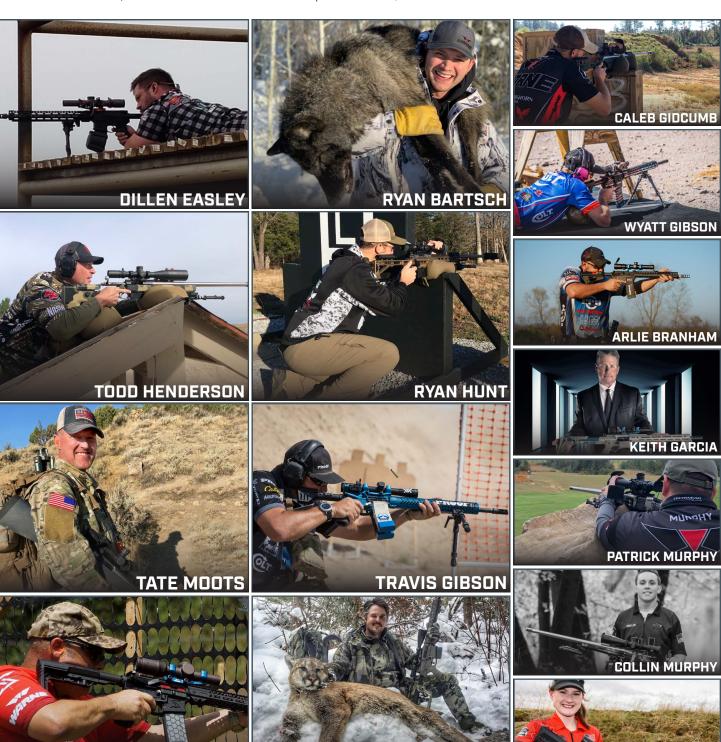

NICK ATKINSON

TEAM WARNE

D S S

STAFF



WARNE SCOPE MOUNTS 9500 SW TUALATIN ROAD TUALATIN, OR 97062 USA

WARNESCOPEMOUNTS.COM