

Additional Mounts Available

The Resistance® 22M Suppressor has many accessory options to suit your specific needs. To see available parts visit our website.



Stealth Flash Hider



Hammer Comp



Taper Mount Conversion
Part# GATMBS

3 Lug Adapters



Quick Detach Kit

PRODUCT LIFETIME LIMITED WARRANTY:

Subject to the limitations outlined below, Griffin Armament will repair or replace free of charge any product we manufacture for the duration of this lifetime warranty. This warranty is unlimited in duration and covers at Griffin Armament's sole discretion, service, repair, and/or replacement of damaged products caused by normal use. Any repair not covered by the warranty will be billed at a maximum of 30% of current MSRP for a comparable product, subject to BATFE transfer fees as required.

LIMITATIONS: Griffin Armament's warranty does not cover loss, normal wear, damage to our product or the host weapon system resulting in whole or in part from abusive or negligent use, unauthorized modification, improperly threaded barrels, improperly mounted suppressors, improperly loaded or re-loaded ammunition, or neglect. Finish wear is cosmetic and is not covered by this warranty. Any repairs to the unit made necessary by the above mentioned factors may be invoiced to the owner at a maximum of 30% of current MSRP for the most comparable product. The individual barrel lengths and calibers warranted are listed in the manual you receive with your product, or on the product page [applicable only to the most current model of the respective product]. In all cases refer to the product manual for product limitations prior to using a Griffin Armament product. Warranty is subject to change without notice.


To learn more about Griffin Armament and the kit we provide, please visit us on the web at www.GriffinArmament.com or keep track of us via: Instagram, Facebook, and Youtube.



www.GriffinArmament.com

GRIFFIN ARMAMENT

USER MANUAL RESISTANCE® 22 MODULAR SILENCER

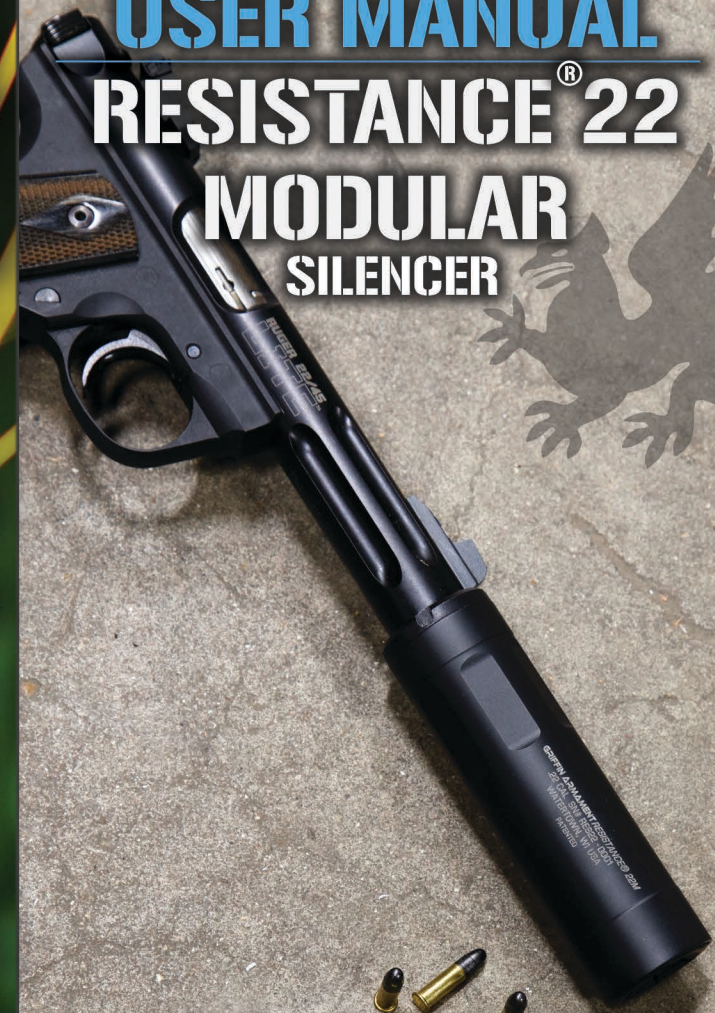

Multi Cartridge User Maintainable .22 CAL Rimfire Suppressor

Configuring The Silencer

1) USING THE INCLUDED DIRECT THREAD ADAPTER

Clean and de-grease the threads of your barrel. Ensure your barrel is threaded 1/2"x28 TPI. Thread your suppressor onto the barrel and have fun shooting!

2) USING TAPER MOUNT MINIMALIST BLAST SHIELD

Unscrew the direct thread adapter using the included suppressor wrench. Clean the threads internal to the bore of the suppressor body. Apply a small amount of Horse Jipe™ 2300 to the threads to ensure ease of future maintenance. Screw the minimalist blast shield into the tube body firmly. There is no need to use a wrench. Enjoy your taper mounted suppressor like the tens of thousands of users have before you.



3) USING QUICK DETACH KIT

Remove your rear mount and clean and lubricate threads as referenced in paragraph 2. Screw 3 lug kit into rear of suppressor body. Use suppressor wrench to tighten and loosen. Install Griffin Armament 3 lug adapter onto host firearm. Pull firmly rearward on the suppressor while holding the host firearm and rotate. Cap should pop forward when locked. Rotate without pulling the suppressor to ensure it is locked before shooting.

STILL HAVE QUESTIONS?

Search Youtube for " Resistance 22M Tutorial " video.

Features of the Resistance® 22M Suppressor



7075 T6 Aluminum
Tube Body, 1.375" OD

1/2-28
Direct Thread
Attachment

HEDP™ Baffles
w/ locking tabs

Griffin Suppressor
Wrench Included

Wipe Compatible
front cap

With over a decade of rimfire suppressor development and manufacturing under our belt, Griffin Armament is proud to offer the Resistance® 22 Modular Silencer as the next generation in rimfire suppressor technology.

The Resistance® 22M is constructed from 7075 T6 Aluminum and features a fully user-serviceable patented HEDP™ baffle stack. Trademark Griffin Armament accessory modularity allows for a wide variety of mounting options beyond the included 1/2x28 direct thread adapter.

Additional features like a wipe compatible end cap and a 1.375" OD (traditionally seen in pistol silencers) give the Resistance® 22M class leading performance across the spectrum of rimfire calibers and even supports a sporting use rating for .223 Remington.

Cleaning and Use

This suppressor should be disassembled for maintenance approximately every 500 rounds. Fully clean baffles, tube ID, threads etc before reassembly. If suppressor is stuck due to ignoring maintenance intervals, we offer pusher tools as well as a maintenance service that can be found on our website.

MAXIMUM RECOMMENDED RATE OF FIRE for a long service life is no more than 5 rounds per minute in a 22 centerfire cartridge (223 Remington) and is full auto rated for 22LR. Common Calibers supported are : All rimfire calibers .17-.22 (ex. 22lr, 22WMR, 17HMR), 5.7mm, and .223 Remington (16" barrel or longer, TM Minimalist Blast Shield mounted ONLY) Direct Thread and 3-lug ratings : all the above and .22 hornet (16" barrel or longer)

Confirm Alignment

Clear your firearm in accordance with it's manufacturers user manual. Mount the suppressor. After mounting the suppressor firmly, look down the silencer bore from the end cap illuminating the bore with a light. Confirm visual alignment by ensuring the bore of the silencer is in the center of the bore of the firearms barrel. If you do not feel capable of confirming alignment take your firearm to your Griffin Dealer. Most silencer dealers that provide gunsmithing services have suppressor alignment check rods and other tools capable of fitting your silencer to your firearm.

Keep in mind each firearm this silencer is used on needs to be checked for alignment prior to use.

WARNING: FAILURE TO READ AND UNDERSTAND THIS MANUAL PRIOR TO USE MAY RESULT IN INJURY OR DAMAGE